



Save valuable time during installation

Heating pump Wilo-Yonos PICO


Your working time is precious and the next customer is probably already waiting for you.

The Wilo-Yonos PICO is the ideal solution for both the initial installation and the replacement of an uncontrolled heating pump in a detached or semi-detached house. Its compact dimensions make it fit perfectly into any heating system. The Wilo-Connector also enables simple, tool-free electrical connection. The intuitive operating concept of the Green Button Technology simplifies commissioning. Coloured symbols support the selection of the desired control mode, which, like the speed levels, is already factory-set. The manual venting function ensures smooth commissioning.

The low-maintenance Wilo-Yonos PICO works very reliably and has automatic protective functions such as automatic restart in the event of a previous blockage or dry-running detection. Should a malfunction nevertheless occur, the displayed error code makes time-consuming troubleshooting superfluous.



Wilo-Yonos PICO

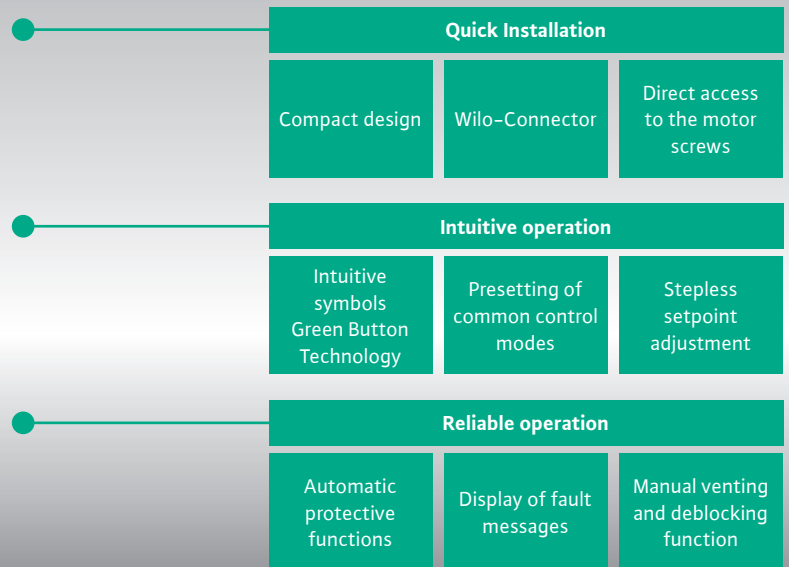


Technical data

- Fluid temperature: -10 °C to +95 °C
- Mains connection: 1~230 V, 50 Hz
- Protection class: IPX4D
- Screwed connection: G 1, G 1½, G 2
- Max. operating pressure: 10 bar

Materials

- Pump housing: Grey cast iron (EN-GJL-200)
- Impeller: Plastic (PP - 40% GF)
- Pump shaft: Stainless steel
- Bearing: carbon, metal impregnated

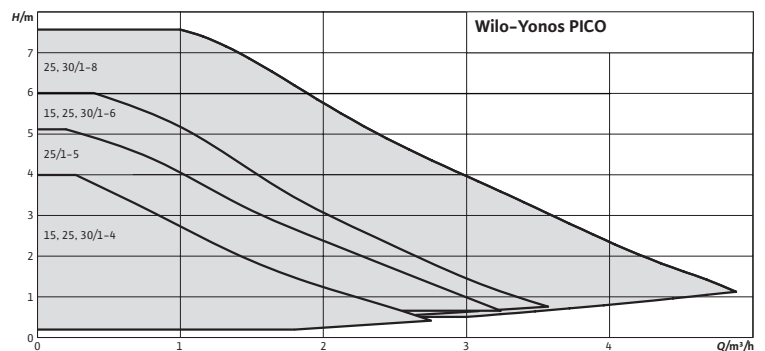

Find out more here: